



**Specification: BR-1015**

- \* Super miniature recessed switch
- \* 1/4" diameter straight cylindrical set for flush or counter sunk installations
- \* Standard 18" #22AWG leads
- \* Special leads available
- \* Switch and Magnet available separately
- \* Resistor, Diode and Supervisory Loop available on request
- \* Colors: White, Brown, Grey

... Recessed Mounted

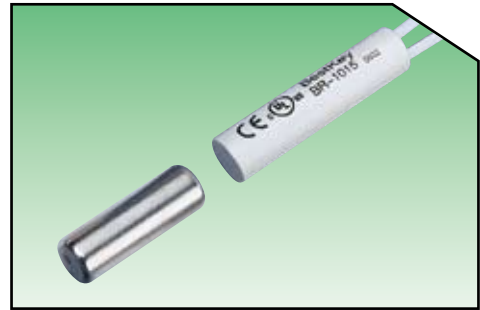

**Dimension (mm):**

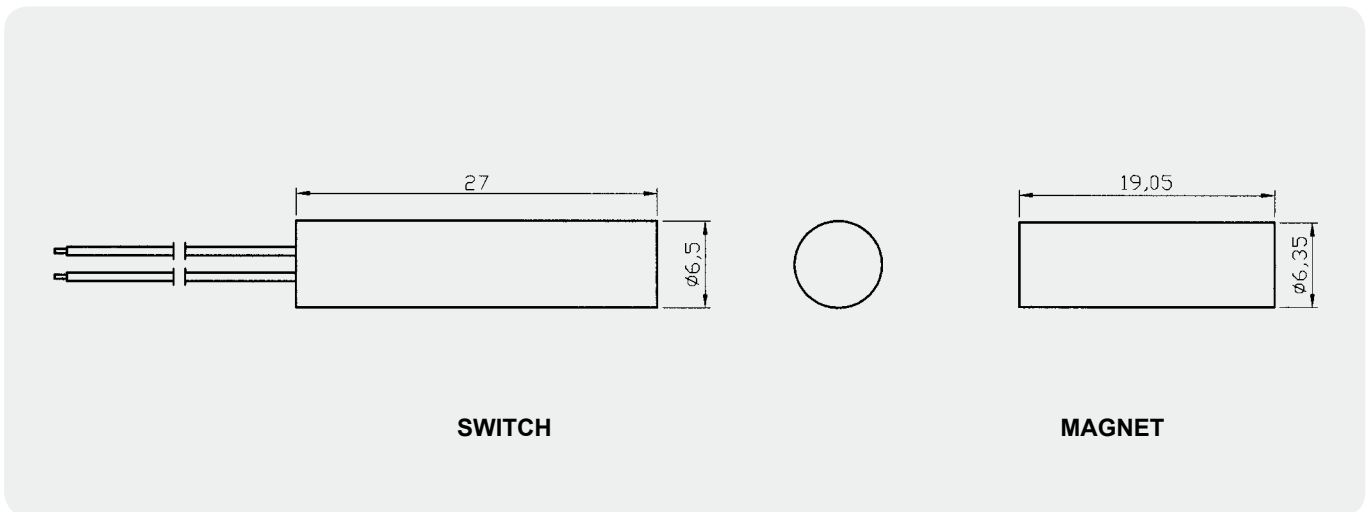

**Order Information:**

Part Number	Loop Type	Reed Form	Closed Gap [Inch(mm)]	Depature Gap [Inch(mm)]	Maximum Initial Contact Resistance (Ohm)	Maximum Contact Rating (W)	Maximum Switching Voltage (VDC/VAC)	Maximum Switching Current (A)
BR-1015	Closed	N/O	1 (25)	1.06 (27)	0.150	10	100	0.5
BR-1015A	Open	N/O	3/4 (20)		0.150	3	30	0.2
BR-1015C	Closed & Open	SPDT	3/4 (20)		0.150	3	30	0.2

