


CODE: **AWO402** v1.3/III
 NAME: **AK 44Ah**

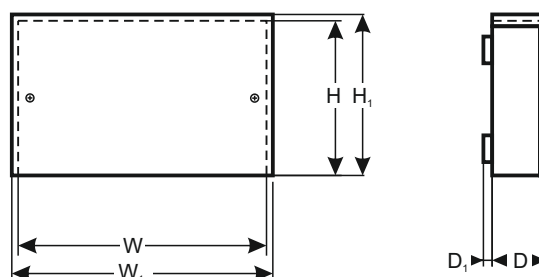

DESTINATION

BATTERIES: 44Ah/12V Sealed Lead Acid (SLA)

TECHNICAL DATA

External dimensions of the enclosure: $W=230, H=200, D+D_1=175+8$ [± 2 mm]

External dimensions of the front panel: $W_1=234, H_1=203$ [± 2 mm]

Fitting battery: 1x44Ah, 1x28Ah, 2x17Ah, 2x7Ah

Weight net/gross: 2,15kg / 2,25kg [$\pm 0,1$ kg]

Operating environment: class II, $-10^{\circ}\text{C}+ 40^{\circ}\text{C}$

Material description: sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003

Destination: indoor

Tamper protection: 1 x microswitch: opening, 0,5A@50V/DC max. NC- contacts

Closing: screwed x 2

Notes: distance from wall (mounting surface)

Warranty: 2 year from the production date