



AWZ510

v.2.1

PU1

Relay module



Edition: 5 from 01.03.2018
Supersedes the edition: 4 from 01.03.2013

EN

1. Intended use.

The PU1 (AWZ510) relay module is to be used in low-voltage installations. It is intended for controlling and status indication in e.g. alarm or access control systems. It may be used to control devices of high power consumption via OC outputs of alarm systems. Moreover, it ensures galvanic isolation of signals, power sources relating to the outputs of the module. It features a serial fuse in the circuit of the relay (C, NO, NC).

2. Installation.

The module is equipped with a plastic panel with self-adhesive tape that enables fixing it to a flat surface (side panel of an enclosure, a buffer PSU, etc.) and holes for bolting the panel to the mounting surface.

3. Description of the module.

3.1 Components.

1 – relay
2 – fuse
3 – LED (indicates relay's operations)
4 – module terminals

3.2 Connectors.

-I+ inputs of the voltage that control the relay
C – common terminal of the relay
NO – normally open relay's contact
NC – normally closed relay's contact

4. Specifications.

Voltage of the relay's coil	10÷16V DC/ 10÷13V AC (-/+5%),
Current of the relay's coil	33mA@12VDC
Resistance of coil	360 OHM (-/+10%)
Power of coil	400mW
Number of relays	1
Voltage of the relay's contacts	30VDC / 50VAC max.
Current of the relay's contacts	1A max.
Contacts of relay	C/NC/NO (leads $\Phi 2.05$ mm: AWG 24-12)
ON/OFF time	15ms/8ms (-/+5%)
Fuse F1	F1,5A
Operating conditions	2nd environmental class, -10°C÷ 40°C
Enclosure	open-frame design, IP00
Dimensions	L=50, W=43, H=20 [mm, +/-2]
Net/gross weight	0,02 / 0,04 [kg]
Installation	installation tape or installation bolt x2
Declarations, warranty	CE, 2 year from the production date
Notes	leads on connections: $\varnothing 0,41\div 1,63$ (AWG 26-14), $\varnothing 0,51\div 2,05$ (AWG 24-12) - relay contacts


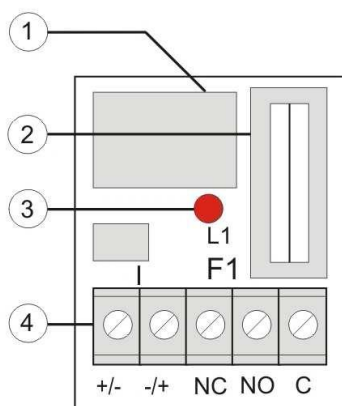


Fig. 1. General view of the module.

5. Electrical diagram.

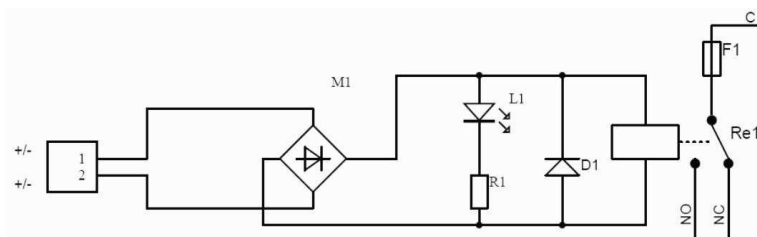

WEEE PARKING

According to the EU WEE Directive – It is required not to dispose of electric or electronic waste as unsorted municipal waste and to collect such WEEE separately.

Pulsar

Siedlec 150, 32-744 Łapczyca, Poland
Tel. (+48) 14-610-19-40, Fax. (+48) 14-610-19-50
e-mail: biuro@pulsar.pl, sales@pulsar.pl
[http:// www.pulsar.pl](http://www.pulsar.pl), www.zasilacze.pl