

DS-KAW50-1

Power Supply for Door Station



MODEL

DS-KAW50-1




MAIN FEATURES

- Short circuit protection, over load protection, and over power voltage protection
- Mean Time Between Failure > 200,000 hrs
- Natural air cooling
- LED power indicator
- 100% full load aging
- ullet 105 $^{\circ}{\mathbb C}$ long life electrolytic capacitor
- 5 seconds 300VAC surge voltage input tolerance
- Working Temperature: 70°C
- Passes 5G vibration test

Installation Dimension

LxWxD: 98 x 97 x 38 mm

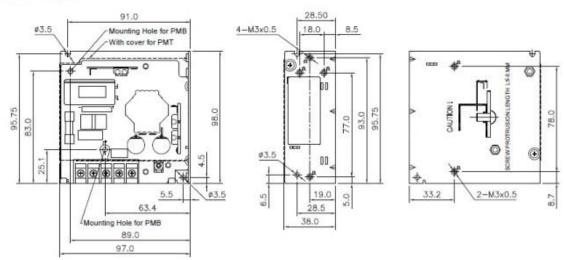

SPECIFICATION

Model	DS-KAW50-1
Network Parameters	
Input Voltage	100-240VAC
Output Voltage	12VDC
Output Current	4.17A
Output Power	50W
Noise and Ripple	< 150mVpp
Voltage Adjustment Range	11-14Vdc
General Information	
Work Temperature	-10℃~+70℃
Work Humidity	<95%
Dimension	98*97*38mm
Weight	0.23kg