


CODE: **AWO004** v1.6/IV
 NAME: **7/TRZ20/SATEL/GRADE3**

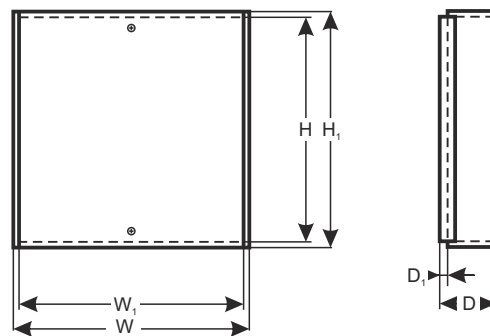

DESTINATION

SATEL: 1) CA 4V1, CA5, CA6, VERSA 5,10, VERSA PLUS, INTEGRA 24

MODULES: 1) CA64 (PP, EPS, ADR, O- R, O- ROC, O- OC, OPS- OC, OPS-R, OPS- ROC, VGM- 16, SR, PTSA, ACC- KP- PS)

TECHNICAL DATA

External dimensions of the enclosure:	W=290, H=280, D=105 [+/- 2mm]
External dimensions of the front panel:	W ₁ =285, H ₁ =285 [+/- 2mm]
Weight net/gross:	3,30kg / 3,50kg [kg]
Battery space:	7Ah/12V Sealed Lead Acid (SLA)
Transformer:	TRZ 20VA/16V/18V in the case of PC/ABS in class UL94-V0, IP43
Power supply:	230V/AC (-15%/+10%), 50Hz, 120mA (max.)
Power supply output:	U1=16V/AC or U2=18V/AC (-5%, +15%), I1=1,2A or I2=1,0A (max.)
Operating environment:	class II, -10°C+ 40°C
Material description:	sheet steel DC01, thickness: 1,0mm, protection anticorrosion, color: RAL 9003
Destination:	indoor
Tamper protection:	2 x microswitch: opening or removal from wall, 0,5A@50V/DC max. NC/NO contacts
Closing:	screwed x 2, (screwed for front casing)
Notes:	distance from wall (mounting surface) - 15mm, easy door removal
Declaration, warranty:	CE, CLC/TS 50131-3:2003, 2 year from the production date